

AHBRF842AR

APPLICATIONS

FOR OVER 20' FOOT APPLICATIONS , FACTORIES, MACHINES SHOPS WAREHOUSE, SPORT ARENA AND LARGE RETAIL STORES.

SPECIFICATION FEATURES

UL LISTED FOR DAMP LOCATIONS

BALLAST HOUSING. HEAVY DUTY DIE-CAST ALUMINUM CONSTRUCTION , WHITE POWDER COAT FINISH



SOCKET. GX24Q-4 , UL APPROVED

MOUNTING COMES WITH A HOOK FOR EASY MOUNTING , A 3/4" THREADED TOP OPENING TO A STEEL JUNCTION BOX FOR EXTEND PIPE OR A 3' CORD PLUG (ORDER SEPARATELY)

BALLAST HIGH POWER FACTOR 60Hz BALLAST 120V OR 277V

REFRACTORS- 16" OR 22" DIAMETER CLEAR RIBBED PRISMATIC ACRYLIC (UV STABILIZED) AND ALUMINUM

WATTS MAX IDEAL FOR 4, 6 , 8 PL42

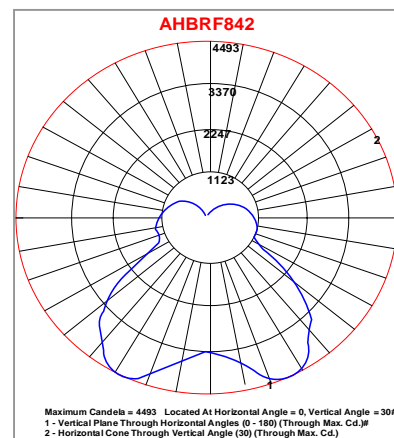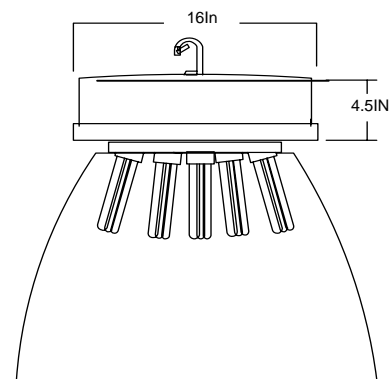

FIXTURE PREFIX	WATTAGE	LIGHT	VOLTAGE	REFLECTOR	ACCESSORIES & OPTION
AHBRF	442 642 842	4=4 PL42W 6=6 PL42W 8= PL42W	120=120V 277=277V	AR122=22" ACRYLIC AR116=16" ACRYLIC AL122=22" ALUMINUM AL116=16" ALUMINUM	DL=DROP LENS FL=FLAT LENS CL=CONICAL LENS WG=WIRE GUARD A16310P-120=10' CORD NEMA 5-15P A16330P-120=3' CORD NEMA 5-15P A16333P-240= 3' CORD NEMA L6-15P A1633P-277 3' CORD NEMA L715P APP-03=RIGID 3/4" DIA STEM QRS=120V RESTRIKE SOC & LAMP

EXAMPLE OF A TYPICAL ORDER

AHBRF 842 120 AR122 CL A16310P

See Page 72 for accessories