


ALED-366




Heavy-duty die-cast construction with modular LED light engine design, this slim-profile luminaire is perfectly used in parking garage, canopy or high ceilings. It provides an easy installation with quick mount structure for contractors to work safely and easily in the confined-space areas.

Optional now in 3000K*/4000K*/5000K*

Dimensions

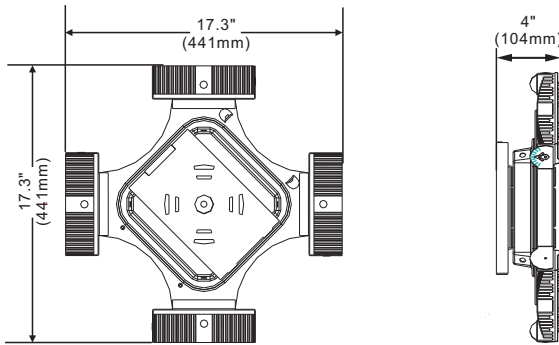

Line Drawing

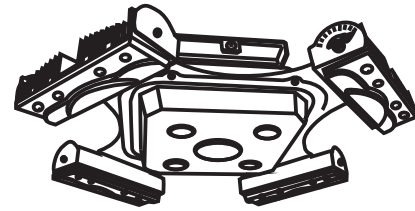

Features

- Solid construction die-cast aluminum body
- UV stabilized power coated finish
- Unique quick mount design
- Compatible with 1-10V dimming

- UL and CUL listed for wet locations
- Optional photo control and motion sensor capability
- Adjustable optics
- Finish – Gray

Specification

Model No.	System watts	Lumen Output	Color	MA	Input Voltage	CRI	Starting Temp	Equivalent
ALED-366	55	4310lm**	5000K	900MA	120~277V	70+	-40°C	150W MH

* Different colors are available with 4 week lead time.

**DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



IP65