




# ASM362

Parking areas, entrances, walkways, underpasses,  
loading docks, recreation areas.

## DIMENSIONS

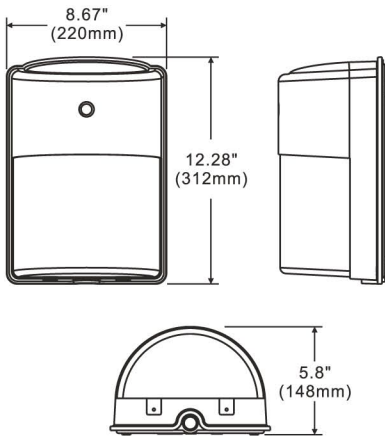

## GENERAL SPECIFICATION

- UL listed for wet locations
- High impact polycarbonate lens and housing
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for HPS 100 Watts , MH 70 Watts and 2 XPL42 Watts Max

## PHOTOCONTROL



## LINE DRAWING



ITEM NO.	LAMP	VOLTS	BALLAST
SM362-P242	2X42W/CFL		HX-HPF
SM362-S10	HPS100W/ED17/E-26	QUAD	HX-HPF
SM362-H07	MH70W/ED17/E-26	QUAD	HX-HPF