




# ASM384

Parking areas, entrances, walkways, underpasses,  
loading docks, recreation areas.

## DIMENSIONS

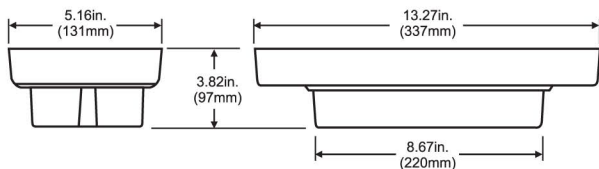


## GENERAL SPECIFICATION

- UL listed for wet locations
- High impact polycarbonate lens
- Die-cast aluminum base plate with conduit access  
Corrosion Resistant
- Silicone rubber included to prevent any leakage from  
the outside
- Ideal for HPS 50 Watts and 1 XPL13 Watts Max

## PHOTOCONTROL



## LINE DRAWING

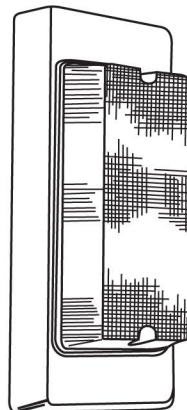

ITEM NO.	LAMP	VOLTS	BALLAST
SM384-P113	1X13W/CFL		HX-HPF
SM384-S05	HPS50W/ED17/E-26	QUAD	HX-HPF