




ASM705

Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.


DIMENSIONS

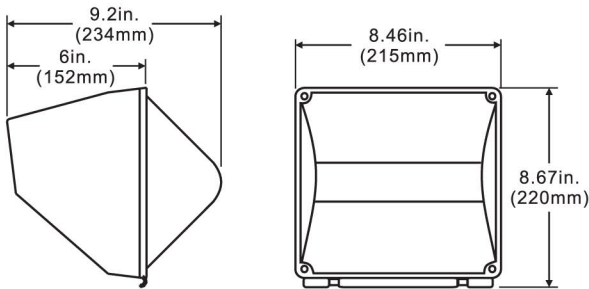

GENERAL SPECIFICATION


- UL listed for wet locations
- Heavy duty die-cast aluminum powder coating construction
- High impact UV polycarbonate lens
- Corrosion Resistant
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for HPS and MH 70 Watts, 1 X PL42 Watts Max

ASSEMBLY PARTS



Wire Guard

LINE DRAWING

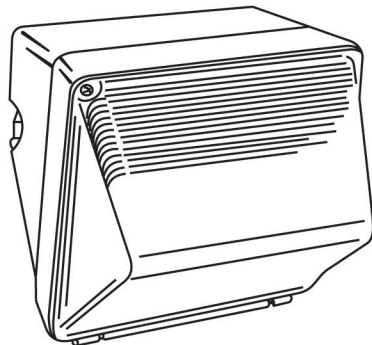

ITEM NO.	LAMP	VOLTS	BALLAST
SM705-P142	1X42W/CFL		HX-HPF
SM705-S07	HPS70W/ED17/E-26	QUAD	HX-HPF
SM705-H07	MH70W/ED17/E-26	QUAD	HX-HPF