

# ASML-009



ASML-009


This rugged-designed LED canopy fixture will outlast the competition. Designed to replace a metal halide 70. This fixture provides efficient light output yet lowers electricity bills. Two dimensions available allow these lights to be used in any environment. Standard under a canopy.




Optional photo control

Optional now in 3000K\*/4000K\*/5000K\*

## Dimensions

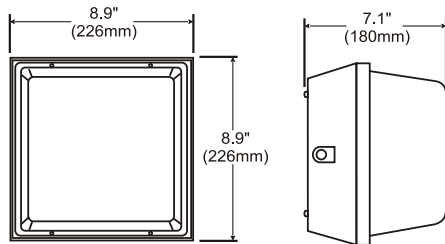

## Line Drawing

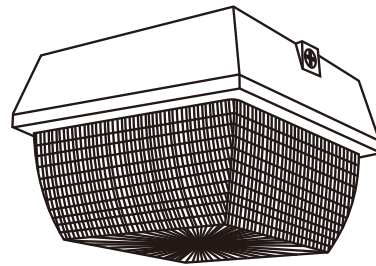

## Features

- Solid construction die-cast aluminum body
- UV stabilized powder coated finish
- High-impact acrylic diffuser
- Optional photo control
- UL and CUL listed for wet locations
- Finish – Bronze / Silver / Black/ Others

## Specification

Model No.	System watts	Lumen Output	Color	MA	Input Voltage	CRI	Starting Temp	Equivalent
ASML-009L1	22	1608lm**	5000K	480MA	120~277V	70+	-40°C	100W MH

\* Different colors are available with 4 week lead time.

\*\*DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

