




ASML-302

Full cutoff wall mount lighting, utilizing highly reliable, high power leds directed to minimize energy while maximizing light distribution. The long life LED engine is position adjustable for 2 different light distributions and combine to provide similar light output to a 150W metal halide for less than 1/3 the energy! This family combines energy efficiency, extremely long life and stylized design.... beautiful in appearance and performance, with a light footprint on the environment!


DIMENSIONS

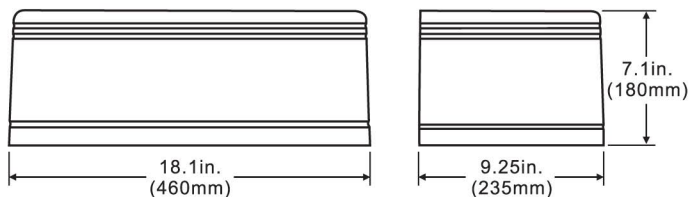

TECHNICAL SPECIFICATIONS

- Die cast housing
- Architectural bronze UV resistant powder coat finish
- UL listed / CUL listed
- Input voltage: 120~277V AC
- Highest quality long life LEDs
- Low Tj for long life, low lumen depreciation
- LED power — 48 Watts
- Input power — approx. 60 Watts
- Lumens per LED — approx. 90~95
- Low starting temp -30°C
- Color temperature — 5100K
- IC current controlled LED circuits

LINE DRAWING

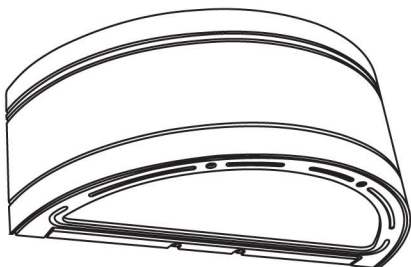

DISTRIBUTION

