

ASML-352-1




This ruggedly designed prismatic wall lighter effectively diffuses and distributes the highly efficient led output to maximize spread and utilization while minimizing wattage consumption. Ideal for energy retro rebates when replacing 70W or lower Metal Halide or HPS.



Optional photo control

Optional now in 3000K*/4000K*/5000K*

Dimensions

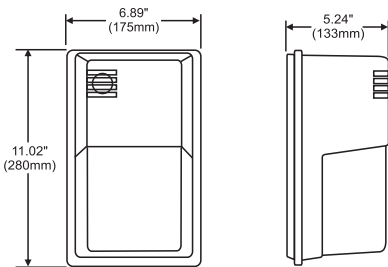

Line Drawing



Features

- Solid construction die-cast aluminum body
- UV stabilized powder coated finish
- Prismatic lens for uniform light distribution
- Optional photo control
- UL and CUL listed for wet locations
- Finish - Bronze / White

Specification

Model No.	System watts	Lumen Output	Color	MA	Input Voltage	CRI	Starting Temp	Equivalent
ASML-352-1	13	770lm**	5000K	300MA	120~277V	70+	-40°C	50W - 70W MH