


# ASML-708-L4



Utilizing the latest generation of LED chips, this uniquely designed wall pack delivers a similar light output to a 400w metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.




Wire Guard


Visor

Optional now in 3000K\*/4000K\*/5000K\*

## Dimensions

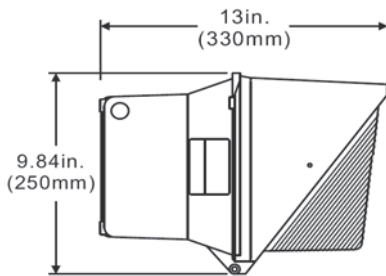

## Line Drawing

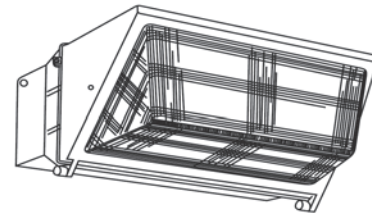

## Features

- Die-cast aluminum body
- New generation LED module
- UV stabilized powder coated finish
- Heat and impact resistant borosilicate glass
- Finish - Bronze / Silver / Black/ Others
- UL and CUL listed for wet locations
- Standard 5000K
- Optional dimming
- 347V Optional
- Surge protector 10K optional

## Specification

Model No.	System watts	Lumen Output	Color	MA	Input Voltage	CRI	Starting Temp	Equivalent
ASML-708-L4	160	15775lm**	5000K	975MA	120-277V	70+	-40°C	400W MH

\* Different colors are available with 4 week lead time.

\*\*DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

