



AUL-16

16" RING REFELCTOR



AUL16-150W Incandescent

AUL16-13CF PL13

AUL16-18CF PL18

AUL16-26CF PL26

AUL16-32CF PL32

AUL16-42CF PL42

AUL16-35-100W HPS or MH

AUL16 34W LED LED 120-277V

COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket.

SHADE. Heavy gauge cold rolled steel and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip. (Also available in solid copper)

ACCESSORIES AND OTHER OPTIONS

- 13W - 42W Fluorescent 120V (ballast mounted inside the neck, globe option is required for outdoor use)
- 35 to 100W High pressure sodium (remote ballast, globe option is required for outdoor use)
- 35 to 100W Metal halide (remote ballast, globe option is required or use MP rated lamp for open fixture)
- 15W-34W LED 120-277V

FINISHES

- White = 0
- Blue = 2
- Green = 3
- Dark Bronze = 4
- Yellow = 5
- Red = 6
- Galvanized = 8
- Painted Chrome = 10
- Satin Copper = 11
- Satin Nickel = 12
- Painted Copper = 15
- Unfinished = 22

(for custom colors please contact us)

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

ETL LISTED FOR WET LOCATION



RING REFELCTOR



When You Choose Ark You Choose Quality


Ideal for store fronts, restaurants, above counter, loft style designs and various other public and industrial style locations. Available in a variety of sizes, finishes, mounting options, light sources and with a large selection of accessories.

Materials - Fixtures spun of 18-gage cold-rolled steel and powder coated for a durable high-end finish.

Voltage - See Voltages Below or Contact us For Custom Options **Socket** - #30 Medium Base Porcelain Socket (Standard)

Warranty - 1 Year Full Warranty

Listing - All Fixtures are UL or ETL Approved

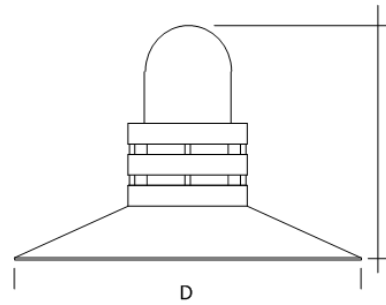

Fixture Type	Incandescent Max Watt	Integral Fluorescent Max Watt	Remote Fluorescent Max Watt	HPS or MH Max Watt	LED Max Watt	Height (")	Diameter (")	Weight (lbs)
AUL-16	100	32	32	100	34	12-1/2"	16-1/2"	5
AUL-18	200	32	32	100	34	15"	18"	5
AUL-22	300	42	42	150	34	18"	22"	6

Rated Wattage	Light Source / Voltage	Remote or Integral Ballast	Indoor or Outdoor	Finish	Cord	Mounting	Globe & Guard Options	Additional Accessories
Incandecce								
Comes with 1/2" #30 Medium Base Socket (see Sockets for Specifications) 120V						Stem Mount: Choose 4' of Factory Pre-Wired Leads For Use With 1/2" Stem or Gooseneck Mounting in Wet & Indoor Locations (WL = Wire Leads)	Globe Required for Outdoor Locations Standard Clear Globe = AVX100GL or AVX200GL	
Compact Fluorescent = CF						Ceiling Mount Choose 4' of White or Black Cord. A Ceiling Canopy is Required. Use ACN-001 Black Cord = BC White Cord = WC (Custom Cord Length Available)	Most Popular: AGB-101 (see Mounting Options for Stem and Gooseneck Specifications) *Custom Bends Available *134= 3/4" Hub * ACN009 or ACN004 Mounting Hardware Included With Purchase of Gooseneck or Stem	
13 18 26 32 42	INT = Integral Ballast (120V) REM = Remote Ballast (120-277V)		Indoor = SCE Outdoor = RTE (for Remote Ballasts)	White = 0 Black = 1 Blue = 2 Green = 3 Dark Bronze = 4 Yellow = 5 Red = 6 Galvanized = 8 Painted Chrome = 10 Satin Copper= 11 Satin Nickel = 12 Painted Copper=15 Unfinished=22			Standard Clear Globe & Guard = AVX100DG or AVX200DG	Colored Cap: ACC-002
High Pressure Sodium = HPS								
35 50 70 100 150	Remote Ballast Required 35W = 120V 50W-150W = 120/208/240/277V (MT)		For Outdoor a Globe is Required (see Globes & Guards)					
LED								
12 15 20 34	3K 4K 6K						(AVX200 for 42PL, 50MH, 70HPS, 100HPS, 150HPS)	Ceiling Canopy: ACN001
Metal Halide = MH								
	Globe Required (see Globes and Guards for Options and Accessories) Remote Ballast Required 50W-150W = 120/208/240/277V (MT)						(see Globes and Guards for Globe Colors and Specifications)	(see Accessories for more options)
50 70 100 150 150	The 50W Metal Halide option can be with a MP Socket or Medium Base Socket MP = Open Rated (No Globe Allowed) Medium Base (Globe Required) The 70W - 150W Metal Halide options are with MP Socket Only							

Sample Order	Fixture	LED	Indoor / Outdoor	Finish	Cord	Mounting	Globe/Guard	Accessories
	AUL-16	34W		GA	WC			ACN001